




## 240 input VAC 60 Hz Power conditioner Product Specification (7000 VA) CASE 4


<b>Model No.</b>	<b>NPT7000-H-NS</b>
<b>Part No.</b>	<b>13-00700-XX</b>
<b>Power Rating (VA)</b>	7000
<b>Input Voltage (AC)</b>	240
<b>Output Voltage (AC)</b>	240/120
<b>Output Current amps (per leg)</b>	29
<b>THD</b>	<1% added
<b>Overload rating (amps)</b>	
<b>8 milliseconds</b>	330
<b>1 Second</b>	105
<b>10 Seconds</b>	66
<b>Voltage regulation no load to full load</b>	3%
<b>BTU/hour at full load</b>	716
<b>Safety Listing / compliance</b>	cULus / RoHS
<b>Input Plug</b>	See below
<b>Output Receptacle</b>	See below
<b>Weight (Shipping) lbs</b>	143.75

NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

### CASE 4 UNIT DIMENSIONS (In inches)

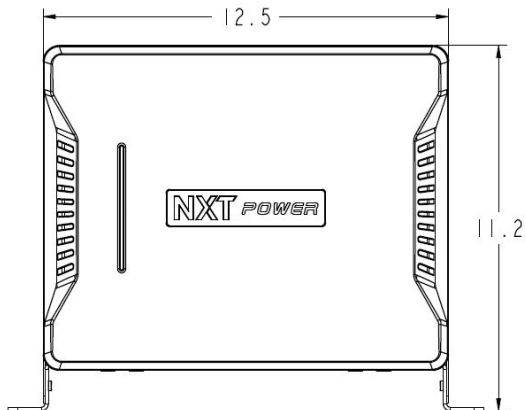

**Front View**

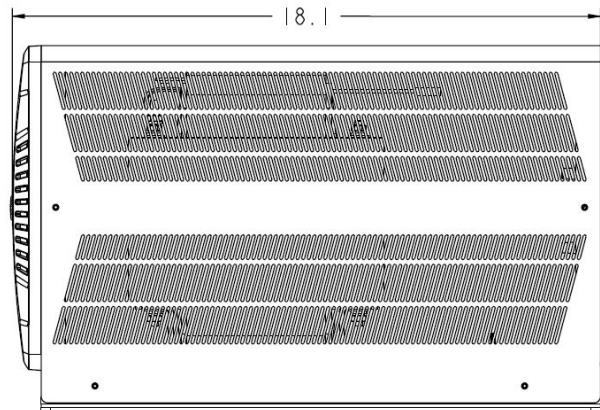

**Side View**

-XX = For part numbers use the below chart to configure the unit with the correct input voltage, plug and receptacle.

-01 = 240 VAC input 240/120 out Hard Wired

**Warranty/Support:** NXT POWER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWER or (877) 698-7697 or visit the NXT POWER website at [www.nxtpower.com](http://www.nxtpower.com).