



120 VAC 60 Hz Power conditioner Product Specification
 (180 VA) CASE 0.5


Model No.	NPT180-GW-NF
Part No.	11-00018-19
Power Rating (VA)	180
Input Voltage (AC)	120
Output Voltage (AC)	120
Output Current (amps)	1.5
Overload rating (amps)	
8 milliseconds	15.0
1 Second	8
10 Seconds	4
Voltage regulation no load to full load	8%
BTU/hour at full load	55
Safety Listing / compliance	cULus / RoHS
Wall Mount	YES
Input Plug	NEMA 5-15P
Output Receptacle	(2) NEMA 5-15R
Weight (Shipping) lbs	7

W in the model number for wall mountable unit; G in model number for NXT Ground technology


NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

CASE 0.5 UNIT DIMENSIONS

(In inches)

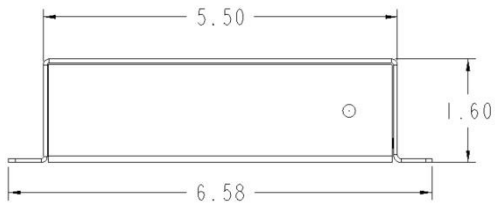

Front View

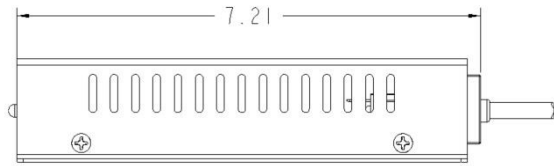

Side View

Warranty/Support: NXT POWER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWER or (877) 698-7697 or visit the NXT POWER website at www.nxtpower.com.