



## 120 VAC 60 Hz Power conditioner Product Specification


(600 VA to 1000 VA) CASE 2

Model No.	NPT600-X-N	NPT720-X-N	NPT840-X-N	NPT1000-X-N
Part No.	11-00060-XX	11-00072-XX	11-00084-XX	11-00100-XX
Power Rating (VA)	600	720	840	1000
Input Voltage (AC)	120	120	120	120
Output Voltage (AC)	120	120	120	120
Output Current (amps)	5.0	6.0	7.0	8.3
Over load rating (amps)				
8 milliseconds	72.0	85.0	96.0	110.0
1 Second	30.0	35.0	40.0	45.0
10 Seconds	13.0	15.0	18.0	20.0
Voltage regulation no load to full load	5%	5%	5%	5%
BTU/hour at full load	102	123	143	170
Safety Listing / compliance	cULus / RoHS	cULus / RoHS	cULus / RoHS	cULus / RoHS
Wall Mount Option	YES	YES	YES	YES
Input Plug	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P
Output Receptacle	(6) NEMA 5-15R	(6) NEMA 5-15R	(6) NEMA 5-15R	(6) NEMA 5-15R
Weight (Shipping) lbs	20	21	25	28


X = W in the model number for wall mountable unit

NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

**CASE 2 UNIT DIMENSIONS (In inches)**

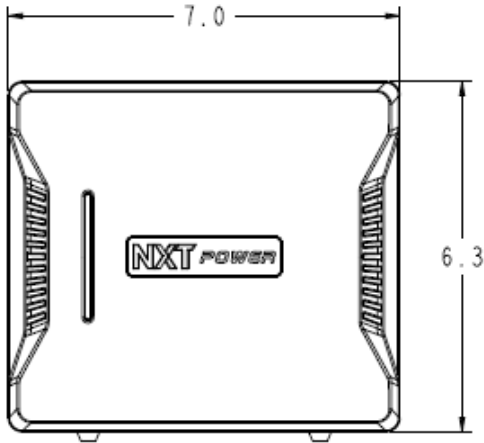

**Front View**

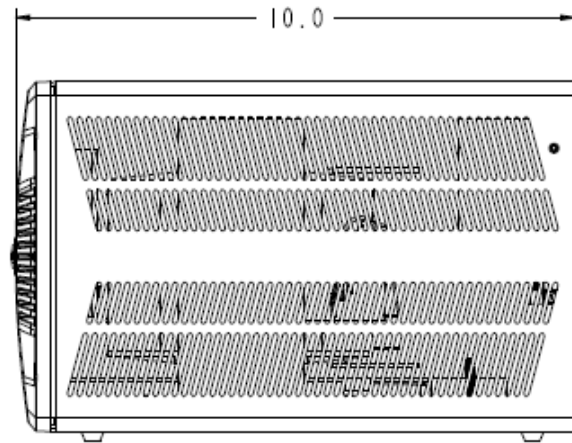

**Side View**

**Warranty/Support:** NXT POWER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWER or (877) 698-7697 or visit the NXT POWER website at [www.nxtpower.com](http://www.nxtpower.com).