



200-240 VAC 50Hz Medical Power conditioner Product Specification (480 VA to 1000 VA) CASE 2


Model No.	NPT480-MX-i	NPT780-MX-i	NPT1000-MX-i
Part No.	12-00048-XX	12-00078-XX	12-00100-XX
Power Rating (VA)	480	780	1000
Input Voltage (AC)	200-240	200-240	200-240
Output Voltage (AC)	200-240	200-240	200-240
Output Current (amps)	2.0	3.25	4.16
Overload rating (amps)			
8 milliseconds	33.0	48.0	60.0
1 Second	14.0	20.0	25.0
10 Seconds	6.0	9.0	11.0
Voltage regulation no load to full load	8%	8%	7%
BTU/hour at full load	100	133	171
Safety Listing / compliance	cULus / RoHS / CE	cULus / RoHS / CE	cULus / RoHS / CE
Wall Mount Option	YES	YES	YES
Output cord	IEC320-IEC320	IEC320-IEC320	IEC320-IEC320
Output Receptacle	(9) IEC320 C13	(9) IEC320 C13	(9) IEC320 C13
Weight (Shipping) kg	8.16	12.24	14.06

UL listed to IEC 60601-1


X = W in the model number for wall mountable unit

NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

CASE 2 UNIT DIMENSIONS (In cm)

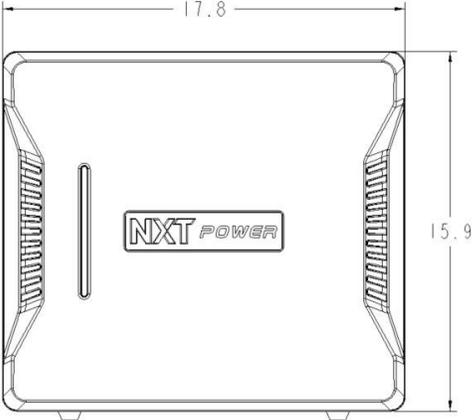

Front View

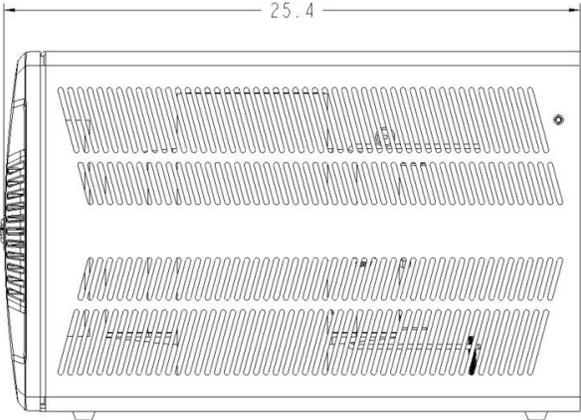

Side View

Warranty/Support: NXT POWER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWER or (877) 698-7697 or visit the NXT POWER website at www.nxtpower.com.