

INTEGRITY MAX Product Specifications

2–6 kVA

MODEL		NPTU2200	NPTU3200	NPTU4200	NPTU5200	NPTU6000
TOPOLOGY		Double-conversion true sine wave output, IGBT rectifier and inverter with internal isolation transformer and manual bypass.				
INPUT	Voltage (VAC)	200 / 208 / 220 / 230 / 240				
	Voltage Range (VAC)	176 – 275				
	Frequency (Hz)	50 / 60 Auto Detect				
	Frequency Tolerance	± 10% (Before Switching to Batteries)				
	Power Factor	≥ 0.99				
	Current THDi	< 5.0%				
	Connection	Hardwired *				
	Rated Current (A)	16	24	26	32	36
OUTPUT	Capacity (VA / Watts)	2200 / 2200	3200 / 3200	4200 / 4200	5200 / 5200	6000 / 5400
	Voltage (VAC)	120/208/240; 115/200/230; 100/200				
	Voltage Regulation	± 1.0% of Nominal (when supplied from either mains input or battery)				
	Voltage THDv	≤ 2.0% Linear Load, ≤ 5% Non-linear Load				
	Power Factor	1.0				0.9
	Step Load Response	± 5.0% for 100% Step Load Change Return to ± 1.0% Within 4 Cycles				
	Crest Factor	3:1				
	Frequency (Hz)	50 / 60 Synchronize with Utility				
	Frequency Regulation	± 0.1 Hz of Nominal				
	Overload	> 105%, ≤ 130% = 10 Minutes > 130%, < 150% = 30 Seconds ≥ 150%, ≤ 300% = 500ms				
	Efficiency	AC-DC-AC ≥ 91.0% DC-AC ≥ 88.0%				
	Connection	Hardwired *				
BYPASS	Voltage Sync Range	Selectable (± 10, 15, 20%)				
	Transformer Voltage Regulation	3%				
	Overload	< 130% = Continuous ≥ 130%, < 150% = 10 Minutes 150% = 10 Seconds				

BATTERY						
BATTERY	Voltage (VDC)	192 Nominal				
	Battery	12V, High Rate, Valve Regulated Sealed Lead-Acid, Flame Retardant				
	Quantity	16				
	Charge Current (ADC)	3 Amps				
	Backup Time (min)	See Run-time Chart				
	Recharge Time	90% > 8 Hrs				
ENVIRONMENT						
ENVIRONMENT	Temperature (°C)	Operating: -5 to 40 °C; Storage: -25 to 55 °C				
	Altitude (m)	Operating: 1,000				
	Humidity	5.0% to 90.0%, Non-Condensing				
	Audible (dBA)	≤ 55 @ 1 Meter from Front of Unit				
	Heat Dissipation (BTU/hr)	742	1080	1417	1755	1822
AGENCIES						
AGENCIES	EMC	FCC Part 15J Class A EN 55022 Class A / CISPR 22 EN/IEC 62040-2 Electromagnetic Compatibility IEC 61000-3-11 Limitations of Voltage Fluctuations & Flicker IEC 61000-3-12 Limits of Harmonic Currents Produced IEC61000-4-2, Electrostatic Discharge IEC61000-4-3, Level 3 Radiated Electromagnetic Field Immunity IEC61000-4-4, Level 4 Electrical Fast Transient/ Burst Immunity IEC61000-4-5, Level 4 Surge Immunity IEC61000-4-6, Level 3 Immunity to Conducted Radio Frequency Disturbances IEC61000-4-8, Level 4 Power Frequency Magnetic Field Immunity IEC61000-4-11, Voltage Dips, Short Interruptions, and Voltage Variations IEC62040-1-1, Safety & Leakage Current IEC62040-1-2, Insulation & Dielectric Rigidity				
	Safety Agencies	UL1778 cUL to CSA22.2 No.107.3 IEC 62040-1				
	RoHS	All Units are RoHS Compliant (where applicable)				
OTHER						
OTHER	Communication	RS-232 USB DB-9 Dry Contacts Internal SNMP Adapter (Optional)				
	Unit Weight (lbs/kg)	276 / 125				
	Shipping Weight (lbs/kg)	342 / 155				
	Plug & Receptacle*	Contact Factory for PDU Configurations				

* Standard configuration is Hardwired. Plug & Receptacle configurations are optional. Consult factory for part numbers.

NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).


SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 µsec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 µsec risetime, 100 kHz decay.

Battery Backup Run Time Chart (Internal Batteries Only)

Model	Load	25%	50%	75%	100%
	NPTU2200		114	56	33
NPTU3200		74	34	19	13
NPTU4200		52	23	13	8
NPTU5200		38	17	9	5
NPTU6000		37	16	8	5

Notes: Run-Times are in minutes and based on new fully charged batteries at 25 deg C ambient.

Product Dimensions (Inches)

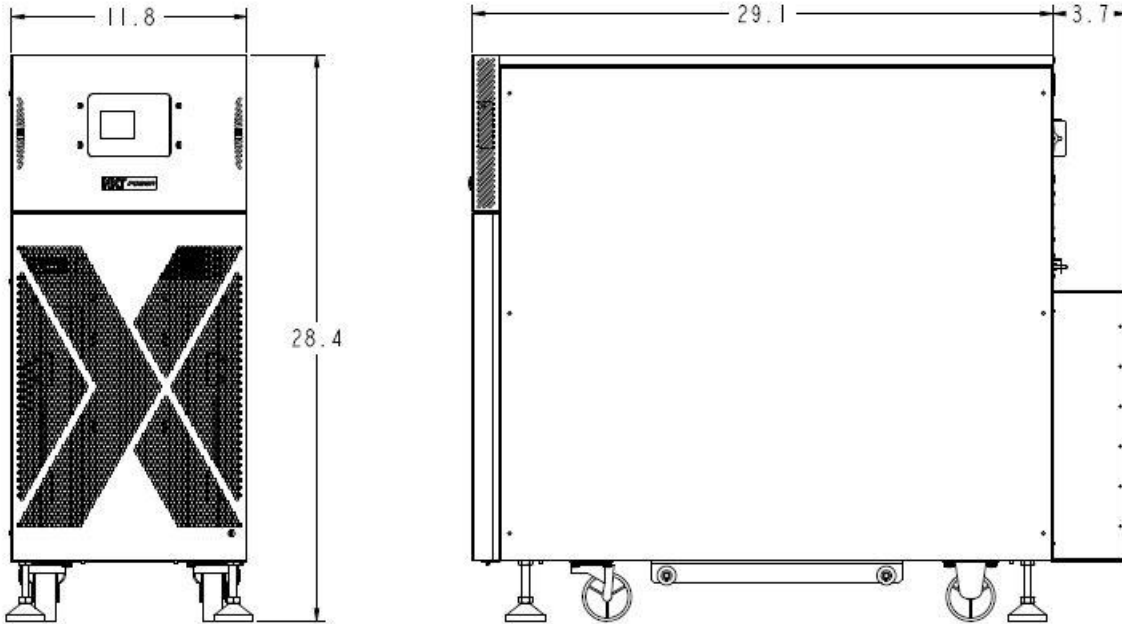

Warranty/Support

NXT Power warrants the components (including internal batteries) used in its uninterruptible power supplies to be free from defects in materials and workmanship for a period of three years from the date of shipment. See Warranty Statement for complete details. For North American service or support on any NXT Power product, please contact NXT Power at (877) NXT POWR (877-698-7697). In Illinois, call (872) 310-4056. To view the NXT Power Warranty Policy and Procedures, visit www.nxtpower.com