




208/240 input VAC 60 Hz Power conditioner Product Specification (6000 VA) CASE 4


Model No.	NPT6000-H-NS
Part No.	13-00600-XX
Power Rating (VA)	6000
Input Voltage (AC)	208 or 240
Output Voltage (AC)	208, 240/120
Output Current amps (per leg)	29
THD	<1% added
Overload rating (amps)	
8 milliseconds	330
1 Second	105
10 Seconds	66
Voltage regulation no load to full load	3%
BTU/hour at full load	594
Safety Listing / compliance	cULus / RoHS
Input Plug	See below
Output Receptacle	See below
Weight (Shipping) lbs	144.0

NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

CASE 4 UNIT DIMENSIONS (In inches)

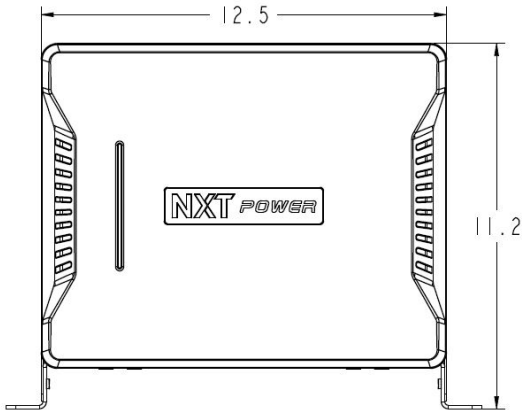

Front View

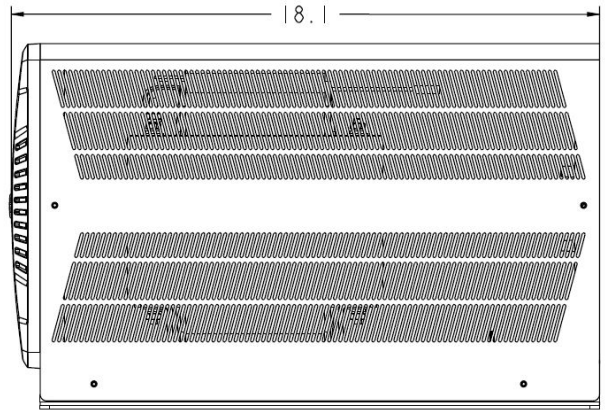

Side View

-XX = For part numbers use the below chart to configure the unit with the correct input voltage, plug and receptacle.

-01 = 208 VAC input 208, 240/120 out Hard Wired

-02 = 240 VAC input 208, 240/120 out Hard Wired

Warranty/Support: NXT POWER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWER or (877) 698-7697 or visit the NXT POWER website at www.nxtpower.com.