



120 VAC 60 Hz Medical Power conditioner Product Specification (240 VA to 480 VA) CASE 1


Model No.	NPT240-XM-N	NPT360-XM-N	NPT480-XM-N
Part No.	11-00024-XX	11-00036-XX	11-00048-XX-N
Power Rating (VA)	240	360	480
Input Voltage (AC)	120	120	120
Output Voltage (AC)	120	120	120
Output Current (amps)	2.0	3.0	4.0
Overload rating (amps)			
8 milliseconds	40.0	50.0	60.0
1 Second	15.0	20.0	25.0
10 Seconds	6.0	8.0	10.0
Voltage regulation no load to full load	9%	8%	6%
BTU/hour at full load	75	85	114
Safety Listing / compliance	cULus / RoHS	cULus / RoHS	cULus / RoHS
Wall Mount Option	YES	YES	YES
Input Plug (HG)	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P
Output Receptacle (HG)	(4) NEMA 5-15R	(4) NEMA 5-15R	(4) NEMA 5-15R
Weight (Shipping) lbs	11	13	15

ULlisted to UL60601-1


X = W in the model number for wall mountable unit

NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

CASE 1 UNIT DIMENSIONS (In inches)

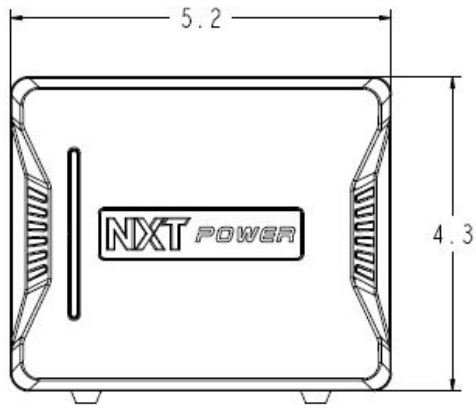

Front View

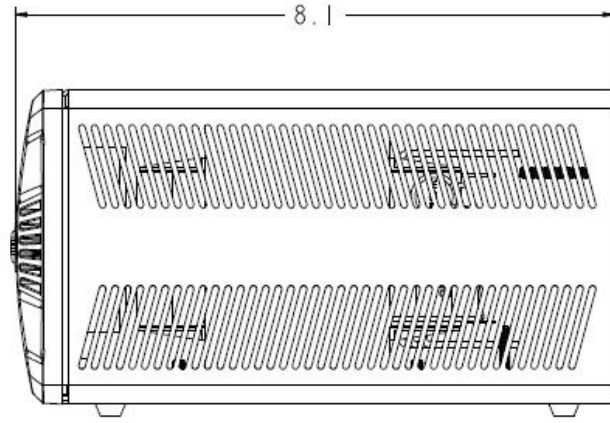

Side View

Warranty/Support: NXT POWER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWER or (877) 698-7697 or visit the NXT POWER website at www.nxtpower.com.