



## 120 VAC 60 Hz PowerHUB


(2000 VA and 3000 VA)

Model No.	NPH2000-H-N	NPH3000-H-N
Part No.		
Power Rating (VA)	2000	3000
Input Voltage (AC)	120	120
Output Voltage (AC)	120	120
Output Current (amps)	16.0	24.0
Overload rating (amps)		
8 milliseconds	145	550
1 Second	60.0	110
10 Seconds	24.0	50
Voltage regulation no load to full load	5%	5%
BTU/hour at full load	275	410
Safety Listing / compliance	cULus / RoHS	cULus / RoHS
Wall Mount Option	YES	YES
Input Plug	HW / NEMA 5-20P	HW / NEMA 5-30P
Output	(4) hard wired CKTS.	(4) Hard Wired CKTS.
Weight (Shipping) lbs	76	76

Weight listed is without the UPS.

NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

**PowerHUB 2000/3000 dimensions shown with UPS**

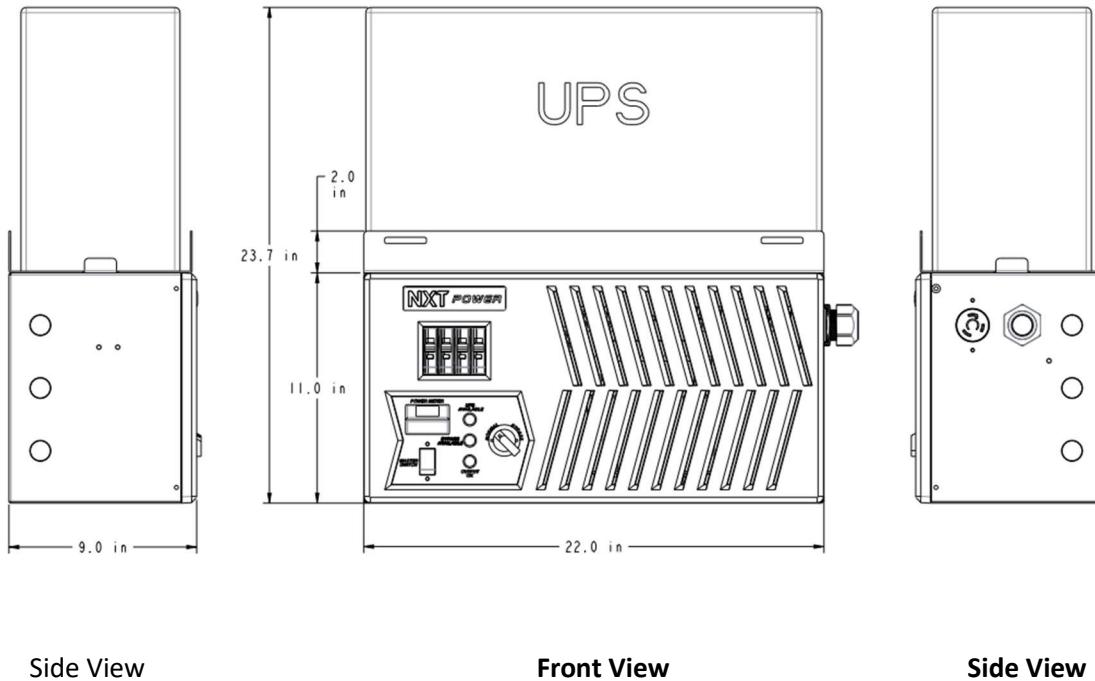

Side View

Front View

Side View

**Warranty/Support:** NXT POWER warrants its PowerHub to be free from defects in materials and workmanship for a period of three years from the date of shipment. For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWR or (877) 698-7697 or visit the NXT POWER website at [www.nxtpower.com](http://www.nxtpower.com).