



200-240 VAC 50Hz Power conditioner Product Specification (80 VA to 240 VA) CASE 1


Model No.	NPT80-X-i	NPT240-X-i
Part No.	12-00008-XX	12-00024-XX
Power Rating (VA)	80	240
Input Voltage (AC)	200-240	200-240
Output Voltage (AC)	200-240	200-240
Output Current (amps)	.35	1.0
Overload rating (amps)		
8 milliseconds	5.0	15.0
1 Second	2.5	5.5
10 Seconds	1.5	3.3
Voltage regulation no load to full load	10%	9%
BTU/hour at full load	28	73
Safety Listing / compliance	cULus / RoHS / CE	cULus / RoHS / CE
Wall Mount Option	YES	YES
Output cord	IEC320-IEC320	IEC320-IEC320
Output Receptacle	(2) IEC320	(2) IEC320
Weight (Shipping) kg	3.62	4.98

UL listed to IEC 61558-2-1


X = W in the model number for wall mountable unit

NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

CASE 1 UNIT DIMENSIONS (In cm)

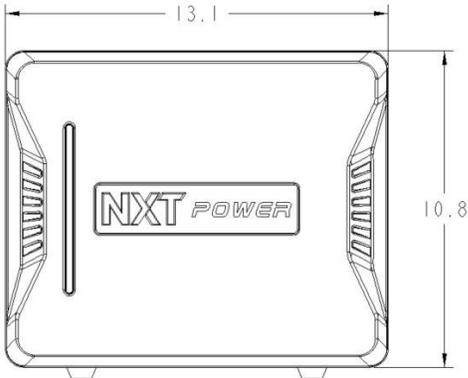

Front View

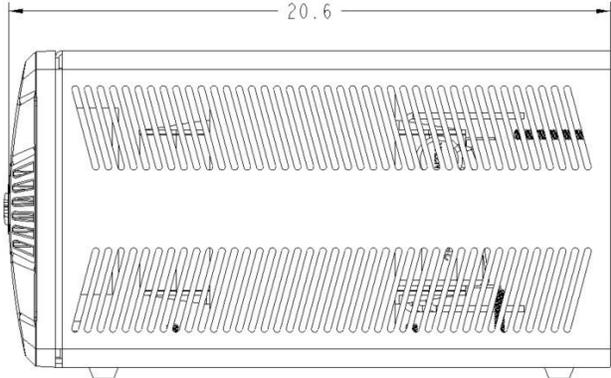

Side View

Warranty/Support: NXT POWER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWER or (877) 698-7697 or visit the NXT POWER website at www.nxtpower.com.