



200-240 VAC 50Hz Power conditioner Product Specification (1200 VA to 2000 VA) CASE 3


| Model No. | NPT1200-X-i | NPT1500-X-i | NPT2000-X-i |
|---|-------------------|-------------------|-------------------|
| Part No. | 12-00120-XX | 12-00150-XX | 12-00200-XX |
| Power Rating (VA) | 1200 | 1500 | 2000 |
| Input Voltage (AC) | 200-240 | 200-240 | 200-240 |
| Output Voltage (AC) | 200-240 | 200-240 | 200-240 |
| Output Current (amps) | 5.4 | 6.5 | 8.5 |
| | | | |
| Overload rating (amps) | | | |
| 8 milliseconds | 78.0 | 90.0 | 120.0 |
| 1 Second | 33.0 | 38.0 | 50.0 |
| 10 Seconds | 14.0 | 17.0 | 22.0 |
| Voltage regulation no load to full load | 5% | 5% | 4% |
| BTU/hour at full load | 205 | 256 | 341 |
| Safety Listing / compliance | cULus / RoHS / CE | cULus / RoHS / CE | cULus / RoHS / CE |
| Wall Mount Option | YES | YES | YES |
| Output cord | IEC320-IEC320 | IEC320-IEC320 | IEC320-IEC320 |
| Output Receptacle | (9) IEC320 C13 | (9) IEC320 C13 | (9) IEC320 C13 |
| Weight (Shipping) kg | 15.42 | 17.69 | 22.22 |

UL listed to IEC 61558-2-1


X = W in the model number for wall mountable unit

NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

CASE 3 UNIT DIMENSIONS (In cm)

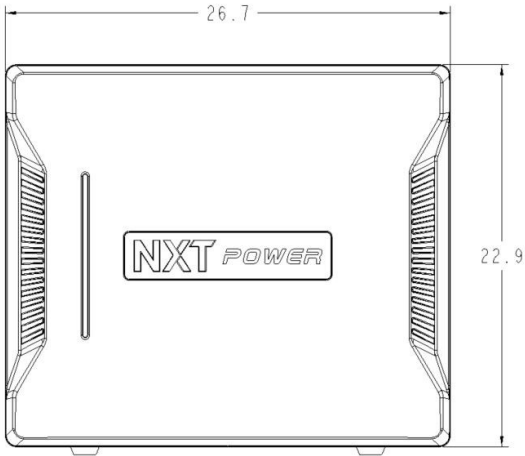

Front View

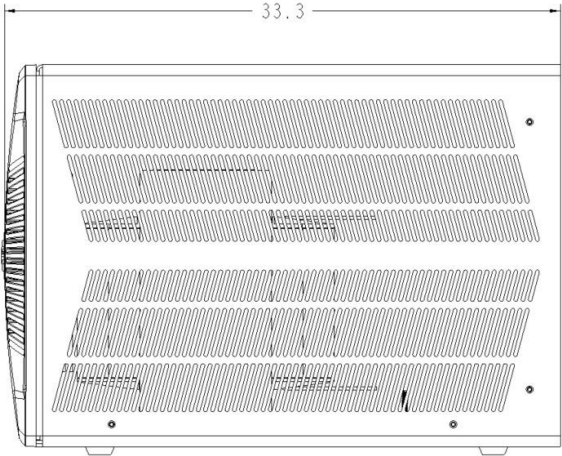

Side View

Warranty/Support: NXT POWER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWER or (877) 698-7697 or visit the NXT POWER website at www.nxtpower.com.