



120 VAC 60 Hz Medical Power conditioner Product Specification

(1200 VA to 2000 VA) CASE 3


Model No.	NPT1200-MX-N	NPT1500-MX-N	NPT2000-MX-N
Part No.	11-00120-XX	11-00150-XX	11-00200-XX
Power Rating (VA)	1200	1440	2000
Input Voltage (AC)	120	120	120
Output Voltage (AC)	120	120	120
Output Current (amps)	10.0	12.0	16.0
Overload rating (amps)			
8 milliseconds	132	145	192
1 Second	50.0	60.0	80.0
10 Seconds	22.0	24.0	32.0
Voltage regulation no load to full load	5%	5%	5%
BTU/hour at full load	165	185	205
Safety Listing / compliance	cULus / RoHS	cULus / RoHS	cULus / RoHS
Wall Mount Option	YES	YES	YES
Input Plug (HG)	NEMA 5-15P	NEMA 5-15P	NEMA 5-20P
Output Receptacle (HG)	(6) NEMA 5-15R	(6) NEMA 5-15R	(6) NEMA 5-20R
Weight (Shipping) lbs	35	42	50

UL Listed to UL60601-1


X = W in the model number for wall mountable unit

NOISE ATTENUATION: When an ANSI/IEEE C62.41 Category A surge is applied in either common or normal mode to the input of the unit <10.0 V normal mode and <0.5 V common mode will be produced on the output. The product employs an isolation transformer and is a separately derived system. A new neutral to ground bond is established on the output of the power conditioner.

CASE 3 UNIT DIMENSIONS (In inches)

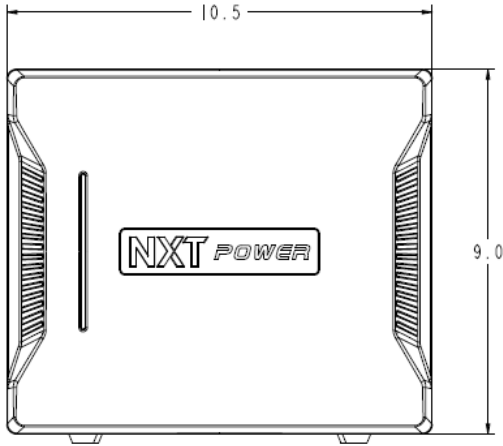

Front View

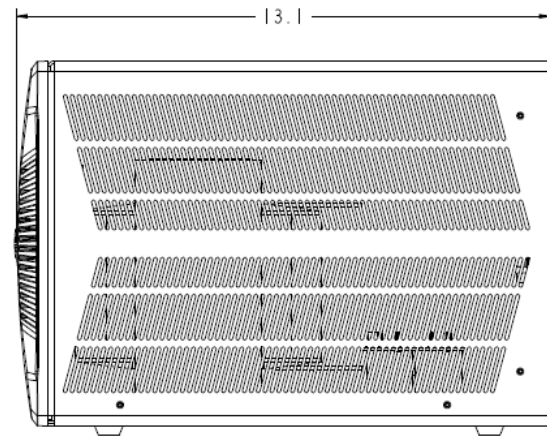

Side View

Warranty/Support: NXT POWER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any NXT POWER product, please contact NXT POWER Technical Support at (877) NXT-POWER or (877) 698-7697 or visit the NXT POWER website at www.nxtpower.com.